

इंटरनेट

मानक



Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan


“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”


IS 3400-10 (1977): Methods of Test for Vulcanized Rubbers, Part X: Compression Set at Constant Strain [PCD 13: Rubber and Rubber Products]

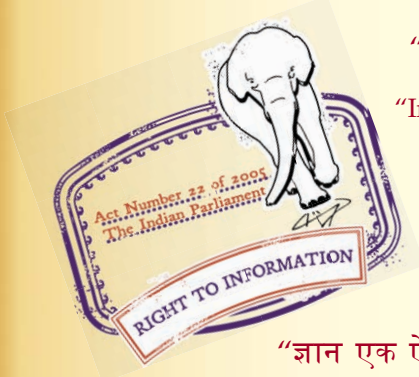

“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”

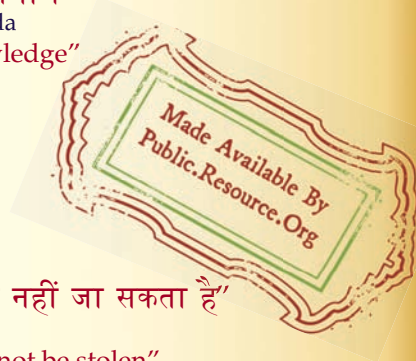

“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”



BLANK PAGE



IS : 3400 (Part X) - 1977

(Reaffirmed 1993)

Indian Standard

METHODS OF
TEST FOR VULCANIZED RUBBERS

PART X COMPRESSION SET AT CONSTANT STRAIN

(*First Revision*)

Fourth Reprint AUGUST 1997

UDC 678.4:620.173

© Copyright 1978

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

Gr 2

January 1978

*Indian Standard*METHODS OF
TEST FOR VULCANIZED RUBBERS

PART X COMPRESSION SET AT CONSTANT STRAIN

(First Revision)

Rubber Products Sectional Committee, PCDC 13

Chairman

DR D. BANERJEE

Representing

Escon Consultants Pvt Ltd, Calcutta

Members

SRI M. L. BAHRANI	Ministry of Defence (R & D)
SRI ANIL AGARWAL (<i>Alternate</i>)	
SRI A. K. BANDYOPADHAYA	Ministry of Defence (DGI)
SRI M. KUMARAN (<i>Alternate</i>)	
SRI A. T. BASAK	Directorate General of Supplies & Disposals, New Delhi
SRI S. K. BOSE	National Test House, Calcutta
SRI A. GHOSH (<i>Alternate</i>)	
DR S. N. CHAKRAVARTY	Bayer (India) Ltd, Bombay
SRI R. R. PANDIT (<i>Alternate</i>)	
SRI D. K. CHATTERJEE	Alkali & Chemical Corporation of India Ltd, Rishra
DR S. K. ROY (<i>Alternate</i>)	
SRI O. P. DHAMIJA	Export Inspection Council of India, Calcutta
SRI P. K. CHATTERJEE (<i>Alternate</i>)	
SRI K. N. GANESH	Indian Petrochemicals Corporation Ltd, Jawahar- nagar
SRI S. B. GANGULI	Dunlop India Ltd, Calcutta
SRI P. N. S. MYER (<i>Alternate</i>)	
SRI A. GEORGE JOHN	Madras Rubber Factory Ltd, Madras
SRI K. J. ABRAHAM (<i>Alternate</i>)	
SRI LALIT MOHAN JAMNADAS	Cosmos India Rubber Works Pvt Ltd, Bombay
SRI PULIN L. KINARIWALA (<i>Alternate</i>)	
SRI R. C. JHINGAN	Indian Oil Corporation Ltd, Bombay
SRI M. K. JAIN (<i>Alternate</i>)	
DR I. V. KRISHNAMURTI	National Rubber Manufacturers' Ltd, Calcutta
SRI J. CHATTERJEE (<i>Alternate</i>)	
SRI S. V. LATHIA	Lathia Rubber Manufacturing Co Pvt Ltd, Bombay
SRI D. P. LATHIA (<i>Alternate</i>)	

(Continued on page 2)

© Copyright 1978

BUREAU OF INDIAN STANDARDS

This publication is protected under the *Indian Copyright Act* (XIV of 1957) and reproduction in whole or in part by any means except with written permission of the publisher shall be deemed to be an infringement of copyright under the said Act.

IS : 3400 (Part X) - 1977

(Continued from page 1)

<i>Members</i>	<i>Representing</i>
SHRI V. N. MAKER	All India Rubber Industries Association, Bombay
SHRI M. M. PATEL (<i>Alternate</i>)	
DR S. P. MANIK	Railway Board (Ministry of Railways*), New Delhi
SHRI D. N. V. CHELLAM (<i>Alternate</i>)	
DR W. MILINS	Indian Rubber Manufacturers' Research Association, Bombay
SHRI N. NAGARAJAN	Sundaram Industries Pvt Ltd, Madras
SHRI P. VIJAYARAGHAVAN (<i>Alternate</i>)	
DR C. K. N. NAIR	Rubber Board, Kottayam
SHRI S. C. NANDY	Bata India Ltd, Calcutta
SHRI SUNIL SARKAR (<i>Alternate</i>)	
DR N. V. C. RAO	Directorate General of Technical Development, New Delhi
SHRI G. R. INAMDAR (<i>Alternate</i>)	
DR G. M. SAXENA, Director (Chem)	Director General, ISI (<i>Ex-officio Member</i>)

Secretary

SHRI SATISH CHANDER
Deputy Director (P & C), ISI

Methods of Testing Vulcanized Rubber Subcommittee, PCDC 13 : 9

Convener

SHRI M. M. PATEL Synthetics & Chemicals Ltd, Bombay

Members

SHRI M. S. MAJUMDAR (<i>Alternate</i> to Shri M. M. Patel)	
SHRI A. K. BANDYOPADHAYA	Ministry of Defence (DGI)
SHRI P. L. NAG (<i>Alternate</i>)	
SHRI B. CHAKRAVARTY	Escon Consultants Pvt Ltd, Calcutta
DR S. N. CHAKRAVARTY	Bayer (India) Ltd, Bombay
SHRI R. R. PANDIT (<i>Alternate</i>)	
SHRI D. K. CHATTERJEE	Alkali & Chemical Corporation of India Ltd, Rishra
SHRI N. C. SAMAJDAR (<i>Alternate</i>)	
SHRI K. C. DAS	Indian Rubber Manufacturers' Research Association, Bombay
SHRI K. N. GANESH	Indian Petrochemicals Corporation Ltd, Jawahar- nagar
DR Y. N. SHARMA (<i>Alternate</i>)	
SHRI A. GHOSH	National Test House, Calcutta
SHRI C. S. INAMDAR	Cosmos India Rubber Works Pvt Ltd, Bombay
SHRI SEN GUPTA (<i>Alternate</i>)	
SHRI G. R. KAVISHWAR	Indian Rubber Regenerating Co Ltd, Thane
SHRI A. R. KANTAK (<i>Alternate</i>)	

(Continued on page 8)

Indian Standard

METHODS OF TEST FOR VULCANIZED RUBBERS

PART X COMPRESSION SET AT CONSTANT STRAIN

(First Revision)

0. FOREWORD

0.1 This Indian Standard (Part X) (First Revision) was adopted by the Indian Standards Institution on 17 October 1977, after the draft finalized by the Rubber Products Sectional Committee had been approved by the Petroleum, Coal and Related Products Division Council.

0.2 This standard was first published in 1969 and has been mainly revised to include sets of temperatures and durations of test which are included in ISO 815-1972 'Vulcanized rubbers — Determination of compression set under constant deflection at normal and high temperatures', published by the International Organization for Standardization.

0.3 This test method for determining the compression set characteristics of vulcanized rubbers is intended to measure the ability of rubber of hardness within the range 30 to 95 IRHD*, to retain their elastic properties after prolonged compression at constant strain.

0.4 In reporting the result of a test or analysis made in accordance with this standard, if the final value, observed or calculated, is to be rounded off, it shall be done in accordance with IS : 2-1960†

1. SCOPE

1.1 This standard (Part X) prescribes a method of test for determining the compression set characteristics of vulcanized rubbers of hardness within the range of 30 to 95 IRHD*, at constant strain under one of the alternative sets of conditions prescribed (see 6.1 and 6.2). With some rubbers, especially those above 95 IRHD*, it may not be possible to achieve 25 percent compression strain. For such rubbers this method does not apply.

*International rubber hardness degrees.

†Rules for rounding off numerical values (revised).

2. TERMINOLOGY

2.0 For the purpose of this standard, the following definitions shall apply.

2.1 Compression Stress — Stress applied so as to cause contraction of the test piece in the direction of stress.

2.2 Compression Strain — The proportionate contraction produced in the test piece by compression stress.

2.3 Compression Set at Constant Strain — The difference between the original thickness of the test piece and that after recovery, expressed as a percentage of the initially applied compression.

3. OUTLINE OF THE METHOD

3.1 A test piece in the shape of a cylindrical disk is subjected to a constant strain under compression in a compression device for a given time at the specified temperature, and then it is allowed to recover for a given time. The difference between original thickness and thickness after recovery is expressed as a percentage of initially applied compression.

4. APPARATUS

4.1 Compression Apparatus — The compression apparatus consists of two or more parallel, flat, highly polished chromium plated steel or highly polished stainless steel plates between the faces of which the test pieces are compressed; these plates are sufficiently rigid to withstand the stress without bending, and of sufficient size to ensure that all the compressed test pieces are within the area of the plates. The plates are held together by a bolt or bolts of suitable size. Steel spacers, preferably in the form of rings, are used to provide for the recommended compression. The spacers are of such a size that contact with the compressed test pieces is avoided.

4.2 Oven — Any well designed, uniformly heated air-oven, capable of maintaining the compression apparatus and test pieces within ± 1 deg of the temperature of test specified in **6.2**. Normally provision shall be made for a slow circulation of air through oven. Air flow shall be such that not less than three nor more than ten changes per hour shall take place.

4.3 Thickness Gauge — A dial micrometer gauge preferably having a raised platform 9.5 mm in diameter and a spherical presser foot 6.35 mm in diameter or alternately having two contact members of domed surfaces with spherical radius of 12.5 mm formed on rods of 10 mm diameter. The gauge should operate on a dead-weight load of 0.85 ± 0.03 N (85 ± 3 g) and shall have a scale graduated in unit divisions of 0.01 mm.

5. TEST PIECES

5.1 Large Type — A cylindrical disk of diameter 29.0 ± 0.5 mm and thickness 12.5 ± 0.5 mm, prepared either by moulding or by cutting. Cutting is done by means of a sharp rotating circular die or circular knife, lubricated with soapy water, and brought carefully into contact with the rubber which is preferably mounted on wood or other suitable backing material, the cutting pressure being kept sufficiently small to avoid 'cupping' of the cut surface.

5.2 Small Type — A cylindrical disk of diameter 13.0 ± 0.5 mm and thickness 6.3 ± 0.3 mm prepared as described in **5.1**.

5.3 Laminated Type — Test pieces conforming to large type (**5.1**) or small type (**5.2**) may be prepared by laminating disks of rubber cut out from sheets provided the number of disks laminated does not exceed 7 for large type and 3 for small type.

NOTE 1 — Two sizes of test pieces described do not necessarily give the same values of compression set and comparison of values obtained from the two sizes should be avoided. Unless specified otherwise in the material specification large size test piece shall be used.

NOTE 2 — The preparation of test pieces by either moulding or by cutting is permitted. For some types of rubber, test pieces prepared by different methods may give different results. Where possible, the preparation of test pieces by moulding is recommended.

NOTE 3 — Laminated test pieces made up of two or more superimposed disks may also be used. These do not generally give the same values of compression set as test pieces of the same dimensions formed of one disk.

6. DURATION AND TEMPERATURE OF TEST

6.1 Duration of Test — The time shall be $24 \begin{smallmatrix} +0 \\ -2 \end{smallmatrix}$, $72 \begin{smallmatrix} +0 \\ -2 \end{smallmatrix}$ or $168 \begin{smallmatrix} +0 \\ -2 \end{smallmatrix}$ hours.

6.2 Temperature of Test — The temperature of test shall be one of the following :

*Standard Laboratory
Temperature ($27 \pm 1^\circ\text{C}$)*

$70 \pm 1^\circ\text{C}$

$85 \pm 1^\circ\text{C}$

$100 \pm 1^\circ\text{C}$

$125 \pm 2^\circ\text{C}$

$150 \pm 2^\circ\text{C}$

$175 \pm 2^\circ\text{C}$

$200 \pm 2^\circ\text{C}$

$225 \pm 2^\circ\text{C}$

$250 \pm 2^\circ\text{C}$

7. PROCEDURE

7.1 Number of Tests — Test three test pieces.

7.2 Conditioning of Test Pieces — The test piece shall be conditioned at the standard laboratory temperature of $27 \pm 1^\circ\text{C}$ for not less than 3 hours immediately before testing.

NOTE 1 — The properties of vulcanized rubbers change continuously with time, these changes being particularly rapid during the first 24 hours after vulcanization. Therefore, no test should be carried out within this period. For accurate comparison between different rubbers, it may be necessary to ensure that these are tested at almost the same interval after vulcanization. For products the maximum interval should be 3 months where the date of vulcanization is known. If this is not known it should be six weeks from the date of receipt by the consumer, unless otherwise specified.

NOTE 2 — Samples and test pieces shall be protected from light as completely as as possible during the interval between vulcanization and testing.

7.3 Measure the thickness of each test piece at the central portion of the test piece. Place one large or three small test pieces symmetrically between each pair of plates together with the requisite spacer(s). Tighten the bolt or bolts so that the plates are drawn together uniformly until they are in contact with the spacer(s). The applied compression should be approximately 25 percent of the original thickness of the test piece so that the appropriate heights of spacer for large and small test pieces are 9.40 ± 0.01 mm and 4.70 ± 0.01 mm respectively. Introduce the compression apparatus containing the test pieces without delay into the central part of an oven which is operating at the test temperature (6.2). Upon completion of the required time of test, remove the compression apparatus from the oven; loosen the bolts, and transfer the test pieces quickly to a wooden bench. Allow them to recover on the wooden bench at $27 \pm 2^\circ\text{C}$ for 30 to 33 minutes. Measure the thickness again.

7.3.1 Cut the test piece that has been used for the test into two along the diameter and examine for any internal defect, such as the presence of air bubbles. If any porosity or defects are found then discard the results.

NOTE — The clamp is maintained at $27 \pm 2^\circ\text{C}$ and its operating surfaces are carefully cleaned before use.

8. CALCULATION

8.1 Calculate the compression set expressed as a percentage of the initial deflection from the following formula:

$$\text{Compression set, percent} = \frac{t_0 - t_1}{t_0 - t_s} \times 100$$

where

t_0 = initial thickness in mm of the test piece,

t_1 = thickness of the test piece in mm after recovery, and

t_s = height of the spacer in mm.

8.1.1 The results for the three test pieces shall agree within 5 percent of the mean compression set value; if they do not, the test shall be repeated.

9. REPORT

9.1 The report shall include the following:

- a) The duration and temperature of test;
- b) The type of test piece (large, small or laminated);
- c) The nature of the test piece (moulded or cut);
- d) Initial thickness of the test piece t_0 ;
- e) The thickness of the test piece after recovery t_1 ; and
- f) The mean value of compression set values.

IS: 3400 (Part X) - 1977

(Continued from page 2)

<i>Members</i>	<i>Representing</i>
DR I. V. KRISHNAMURTI	National Rubber Manufacturers' Ltd, Calcutta
SHRI J. CHATTERJEE (<i>Alternate</i>)	
DR S. P. MANIK	Railway Board (Ministry of Railways), New Delhi
SHRI G. DORAISWAMY (<i>Alternate</i>)	
SHRI V. D. PENDSE	Swastik Rubber Products Ltd, Pune
SHRI S. V. TATHAWADKAR (<i>Alternate</i>)	
SHRI V. R. RAO	Sundaram Industries Ltd, Madurai
SHRI K. C. MADHUSUDHANAN (<i>Alternate</i>)	
SHRI S. SARKAR	Bata India Ltd, Calcutta
SHRI S. ROY (<i>Alternate</i>)	
SHRI A. SEN	Dunlop India Ltd, Calcutta
SHRI J. C. BOSE (<i>Alternate</i>)	
SHRI E. V. THOMAS	Rubber Research Institute of India, Kottayam
SHRI K. KOCHAPPAN NAIR (<i>Alternate</i>)	